

HONDA

EZ Generator Series

**Committed to give you *more* power.
Power within your reach.**



✓ Affordable


✓ Durable

✓ Portable

✓ Fuel-efficient

New!

Honda EZ3000CX S

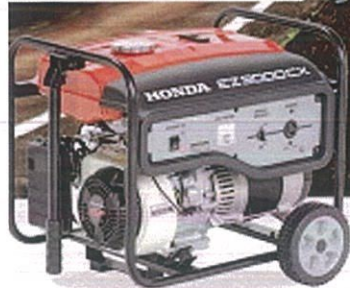

New!

Honda EZ6500CXS S



Reliable Partner. Proven Technology.





www.hondapowerproducts.ph



facebook.com/hondapowerproductsph

SPECIFICATIONS AND FEATURES

Model	EZ3000CX S	EZ6500CX S
		
Rated voltage/Frequency	220V/60Hz	220V/60Hz
Max output [kVA]	3.0	6.5
Rated output [kVA]	2.6	5.5
Rated current [A]	11.8	25.0
Voltage adjustment system	AVR	AVR
Direct current output [Vx]	No	No
Engine (Model)	GP200H VXH1	GX390H1 EDS2
Engine Type	4-stroke, overhead valve, single cylinder	4-stroke, overhead valve, single cylinder
Displacement [cc]	196	389
Engine Speed [rpm]	3600	3600
Max. HP	5.6PS(3600rpm)	11.1PS(3600rpm)
Oil capacity [ℓ]	0.6	1.1
Starting System	Recoil	Recoil & Electric start
Oil Alert	Yes	Yes
Effective fuel tank capacity	15.0 (13.0)	18.5 (Up to Red level)
Fuel gauge	Yes	Yes
Continuous operational available time (Rated) [Hr] (Up to Red Mark capacity)	8.3	5.8
Battery	No	No
Dimension L/W/H [mm]	595 x 435 x 602	684 x 533 x 655
Dry weight [kg]	46.0	76

***Specification may change without prior notice.*

- ✓ **Electromagnetic type circuit protector for stable output at high temperature.**
- ✓ **Improved AVR durability.**
- ✓ **Added condenser for after burn measures.**
- ✓ **Improved fuel tank quality.**

Authorized Dealer:

www.hondapowerproducts.ph



facebook.com/hondapowerproductsph

Honda Philippines Inc.

Lot 34, Phase 1-B, Road 3, First Philippine Industrial Park,
Taanuan City, Batangas

Sales Hotline:

(02) 756-7300

(02) 521-3700

Customer Service Hotline:

1-800-10-HONDAPH

(02) 521-3700